



DESTROYER SERIES
JL JEEP
ROCK RAILS

INSTALLATION INSTRUCTIONS

***PLEASE READ THROUGH THE INSTRUCTIONS BEFORE BEGINNING ANY PART OF THE
INSTALLATION PROCESS***


WEB LINK: <http://lodoffroad.com/assets/pdfs/JRS1814INS.pdf>

1.



Remove the stock rock sliders (if included on vehicle)


The rock sliders mount in the shown areas.

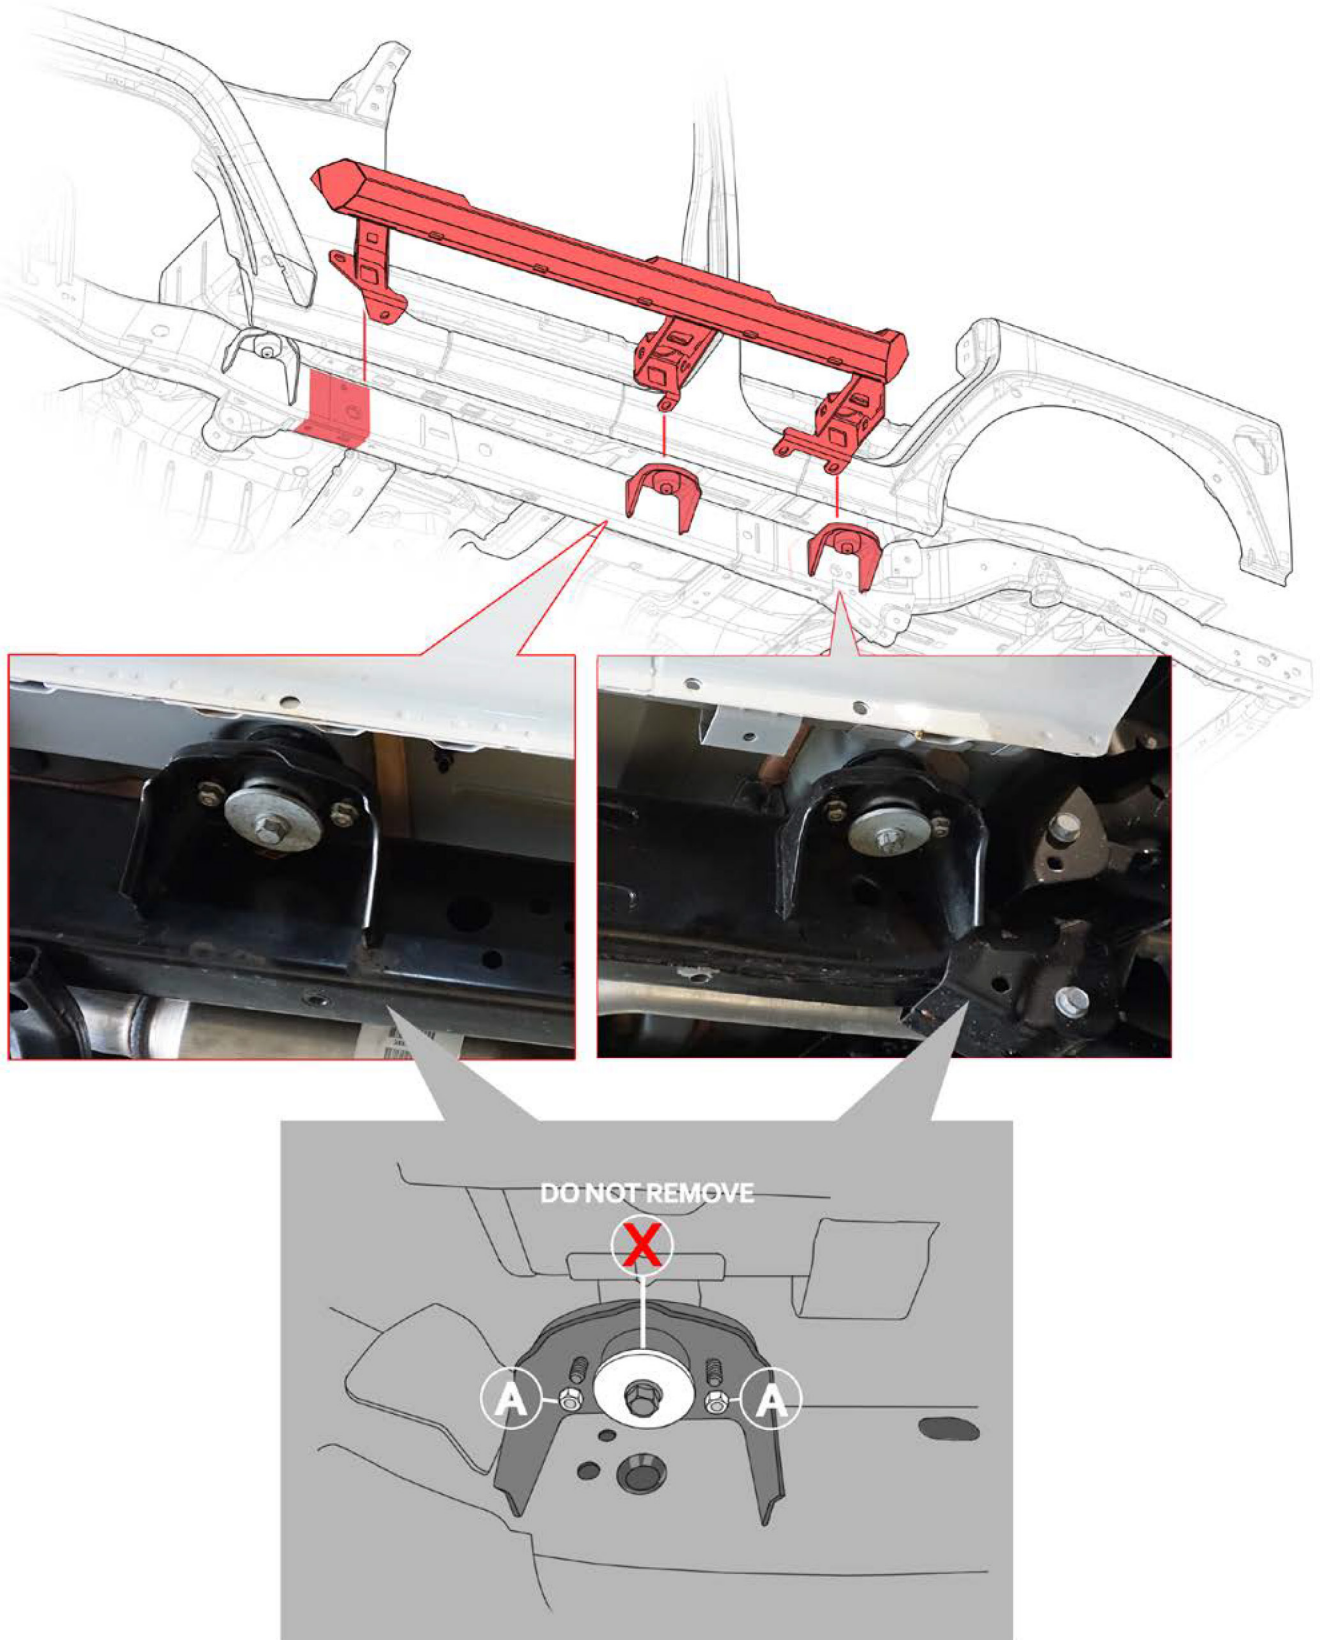

Remove the nuts in position **"A"**
You may need to loosen body bolt **"X"** to get mounts over washer, but **DO NOT REMOVE**.

CENTER AND REAR MOUNTS - (DRIVER SIDE SHOWN)

****Refer to engineering drawings for bolt specs****

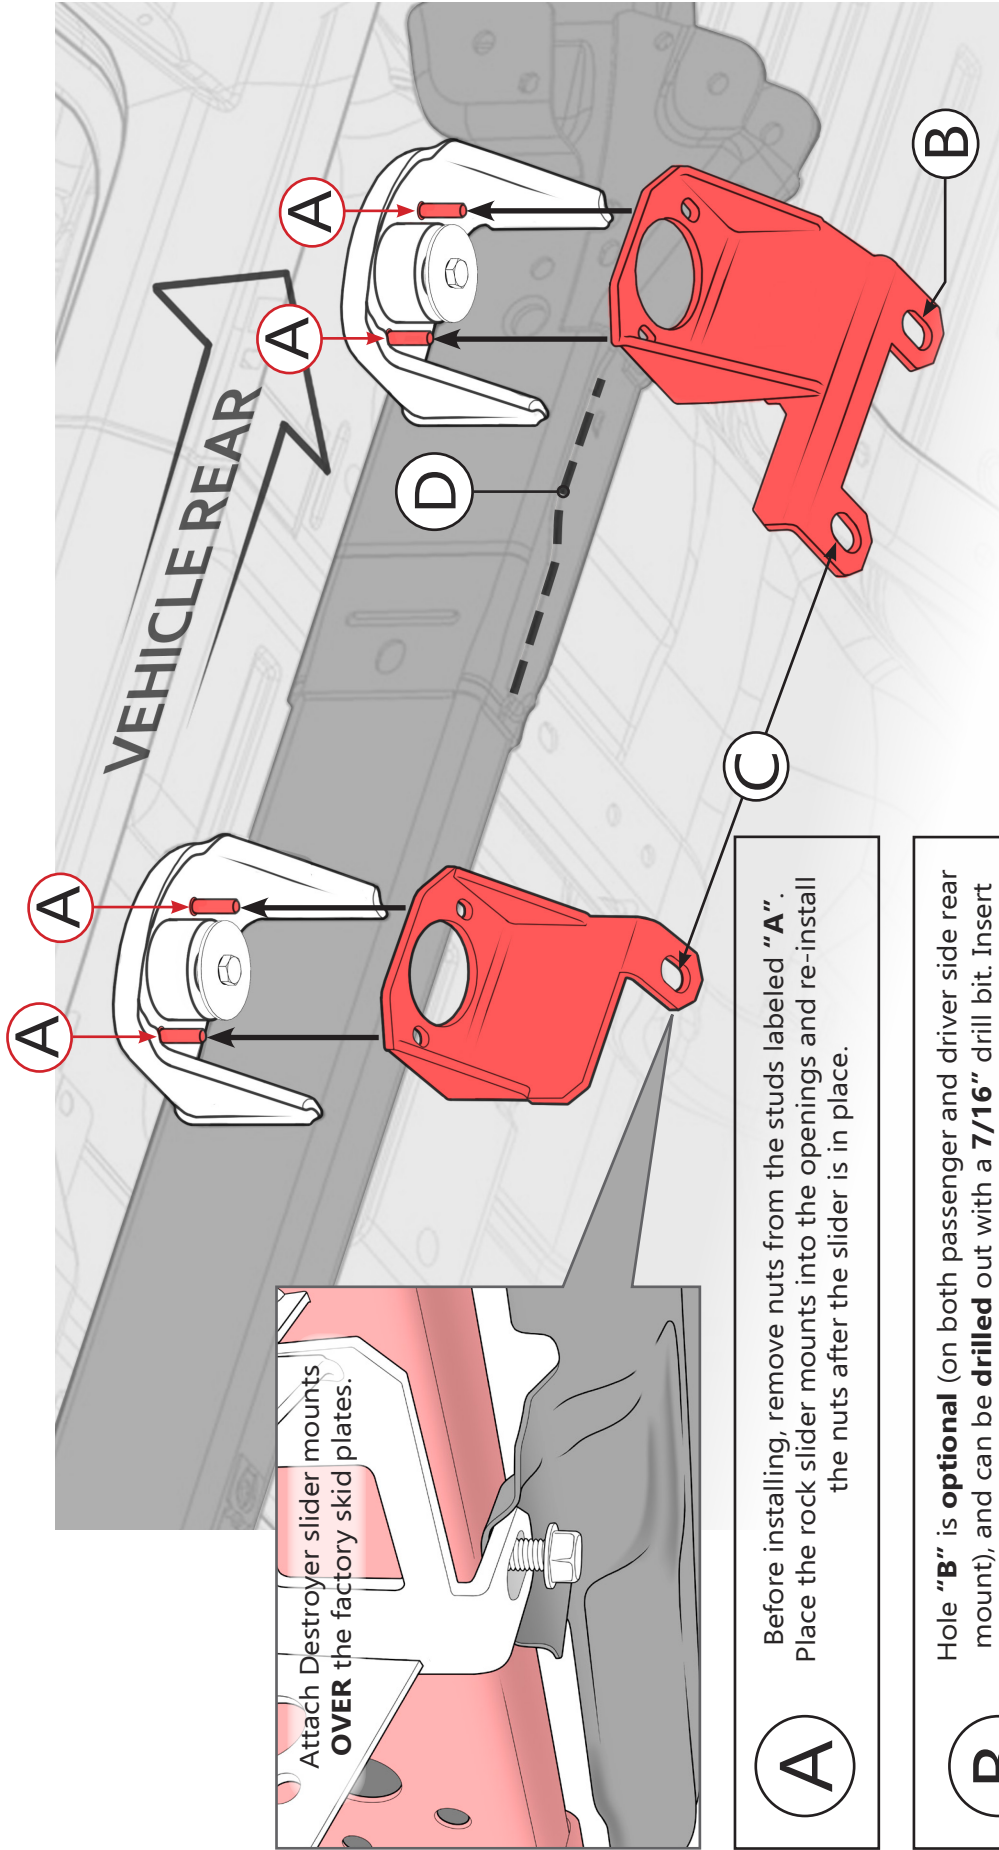

A Before installing, remove nuts from the studs labeled "A". Place the rock slider mounts into the openings and re-install the nuts after the slider is in place.


B Hole "B" is **optional** (on both passenger and driver side rear mount), and can be **drilled** out with a **7/16"** drill bit. Insert the provided 1/2" self-tapping thread roller bolts and slowly tighten them until fully seated.

C We will supply **METRIC** bolts for holes labeled "**C**" on the **DRIVER** side. ****DO NOT CONFUSE THESE WITH THE 1/2" BOLTS IN YOUR KIT THEY ARE SIMILAR.**** You will **re-use the stock bolts** that are already there on the **PASSENGER** side.

D Some welds and seams may need to be ground flat with a hand grinder. The dashed line, labeled "**D**," indicates where we had to grind a drippy weld.

FRONT MOUNT - (Passenger side illustrated for example, both sides are the same)

****Refer to engineering drawings for bolt specs****

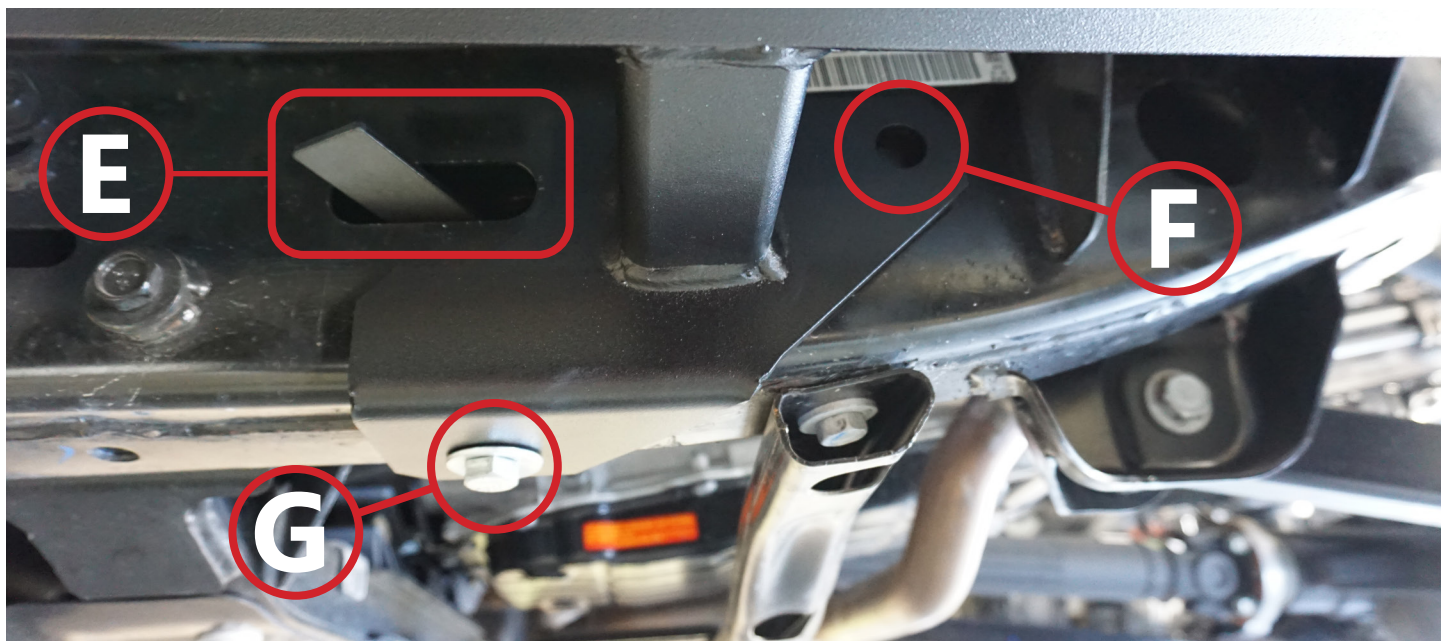


E Insert the flag nut labeled into the rectangular hole.


F Hole "F" is optional, but is *recommended* for off-road use. Mark the hole location, then use a **1/2" or 9/16"** drill bit to drill THROUGH the frame (on the passenger side only, the driver's side has a hole.) Install using 1/2" bolts. Add 1/2" spacer washers between the Jeep frame and front mount if needed.

G Attach 1/2" bolt, lining it up with the flag nut hole in step "E."

Thoroughly tighten all of the bolts, and you should be all set!



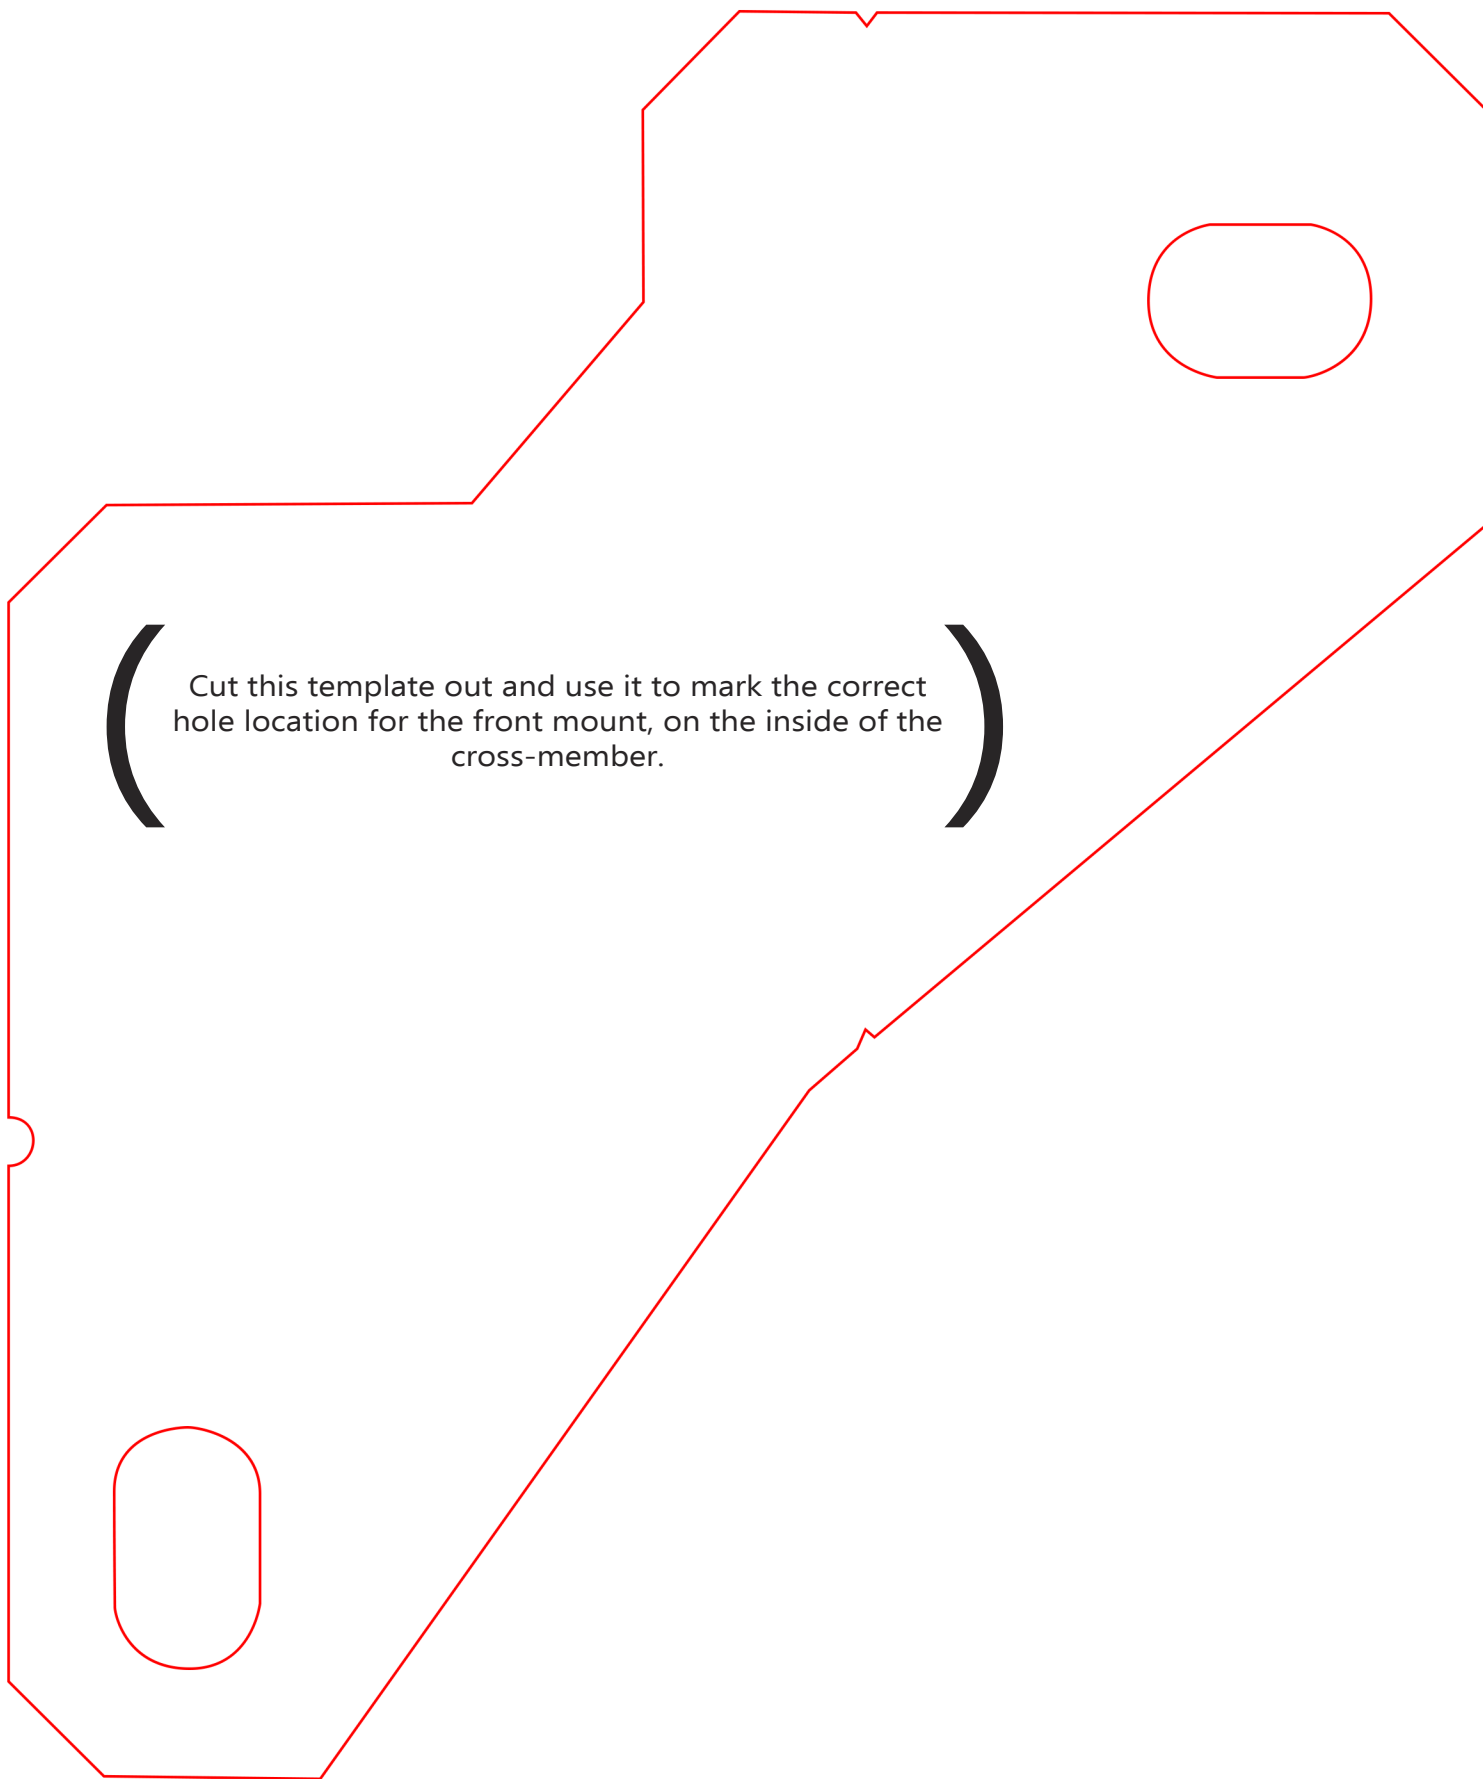

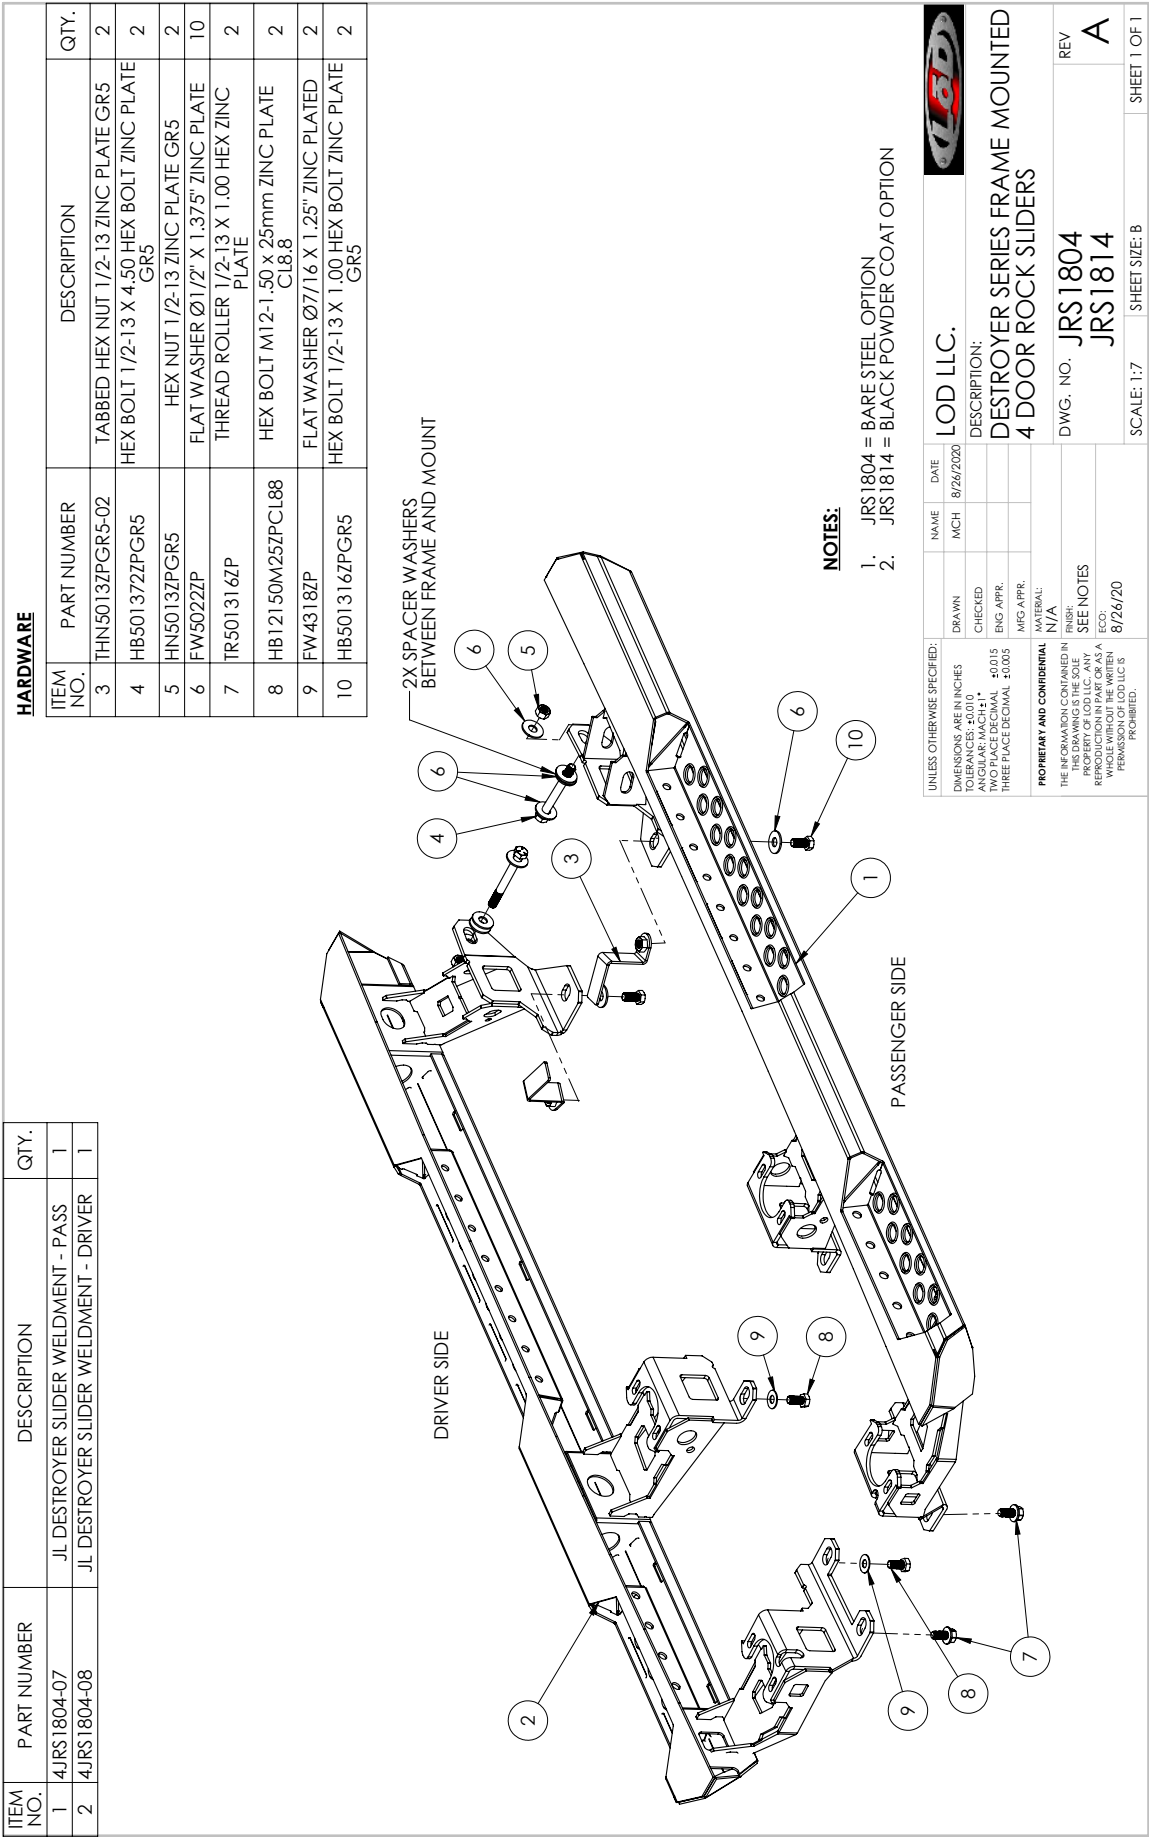





**JL Jeep 4 DOOR
Destroyer Series
Rock Sliders**
SHIPPING SHEET


Packaged by:

On:

Hardware Kit
(contents may
vary)

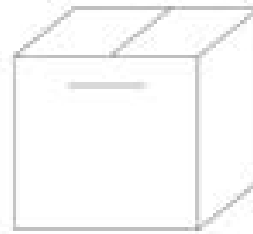

INSTRUCTION SHEET

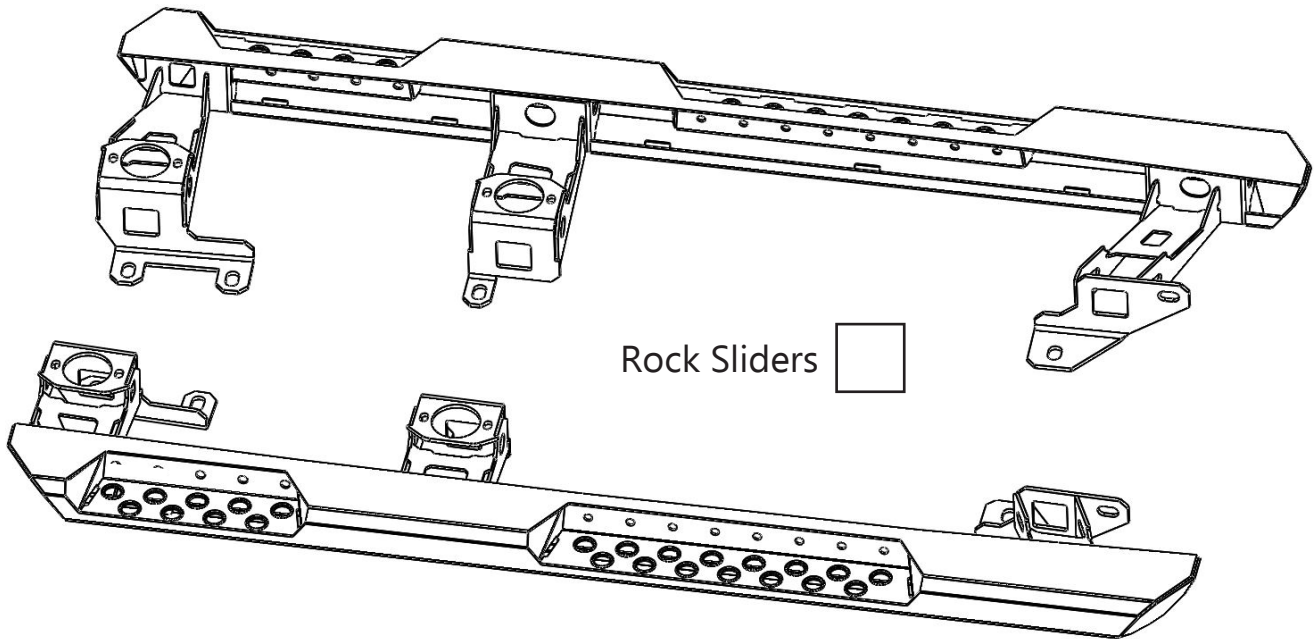

Rock Sliders






**JL Jeep 4 DOOR
Destroyer Series**

Rock Sliders
HARDWARE KIT


Packaged by:

On:

BOLT Kit
(contents may
vary)

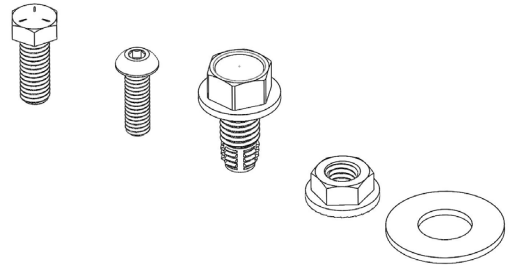

Flag Nut
(x 2)

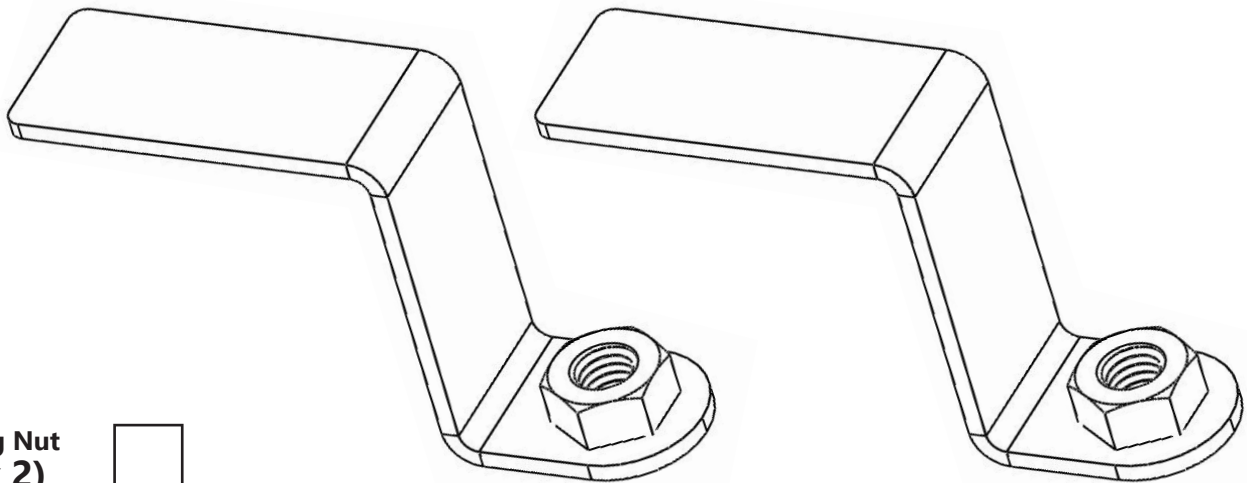




**JL Jeep 4 DOOR
Destroyer Series**

Rock Sliders


BOLT KIT

Packaged by:


On:

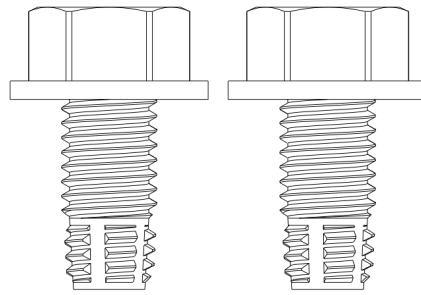


1/2"(13) x 1"
Self Tapping Thread
Roller
(x 2)

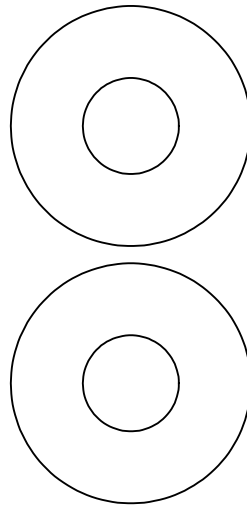


7/16 x 1.25
Flat Washers
(x 2)

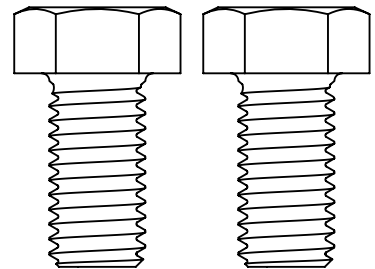


M12-1.5 x 25mm
Hex Bolts
(x 2)

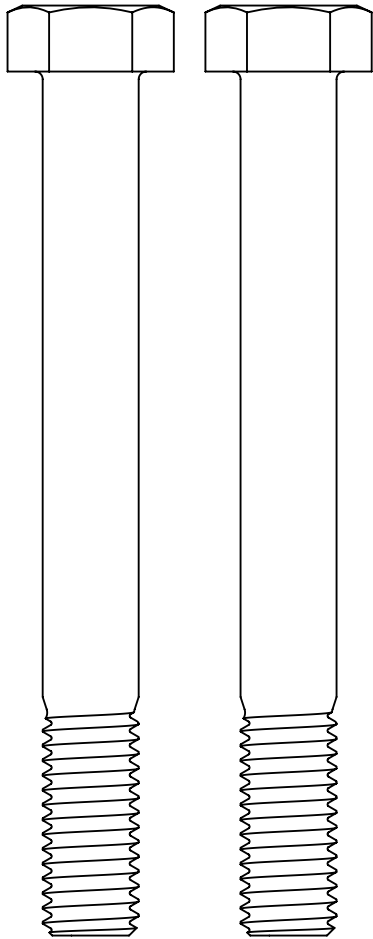

1/2-13 x 4.50
Hex Bolt
(x 2)

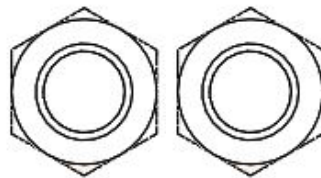


1/2"(13)
Hex Nut
(x 2)

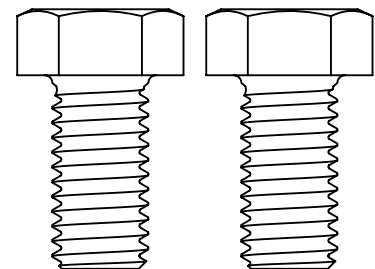

1/2-13 x 1"
Hex Bolts
(x 2)



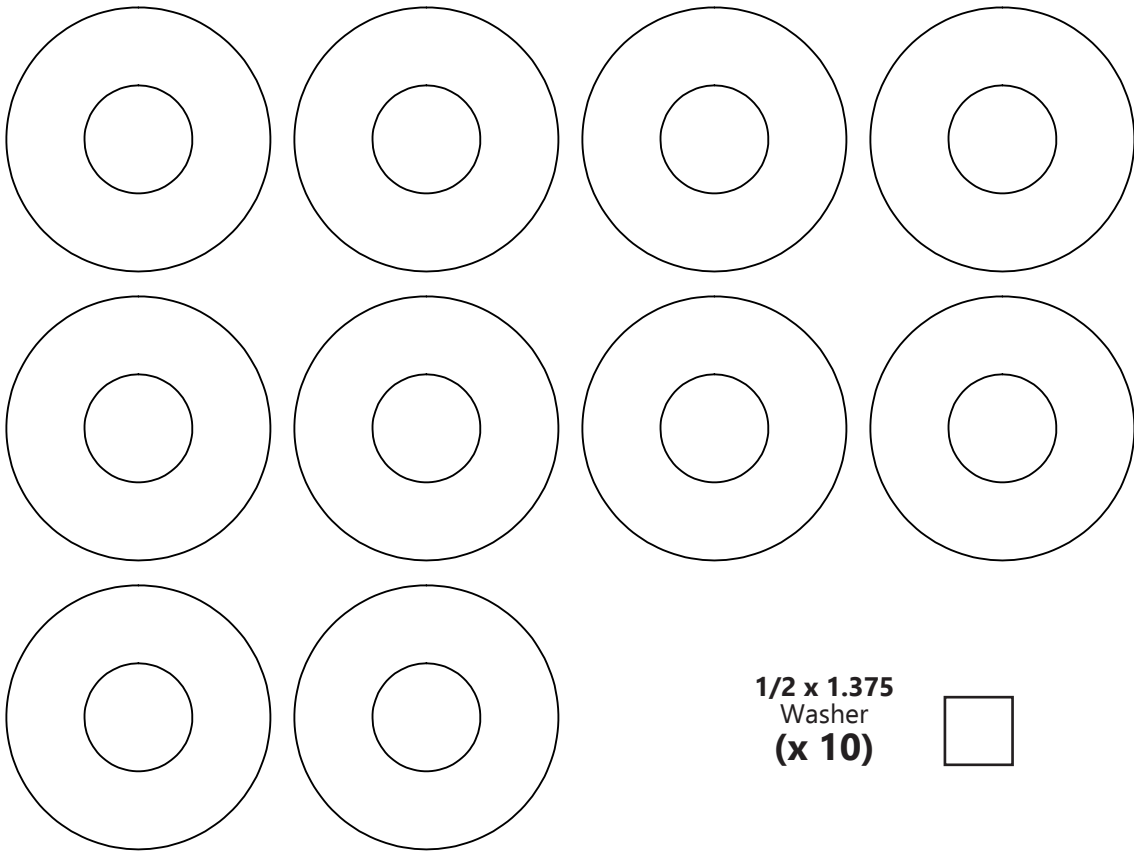

1/2 x 1.375
Washer
(x 10)

